


MICRODUCT REDUCER



- For 3-25 mm Microducts.
- Easy “push-in” installation.
- Crystal clear transparent body.
- 95% of the material is made of non-metal.
- Tested in accordance to EN 50411-2-8:2009.
- Locking rings to prevent accidental removal of connector.

Ordering Information

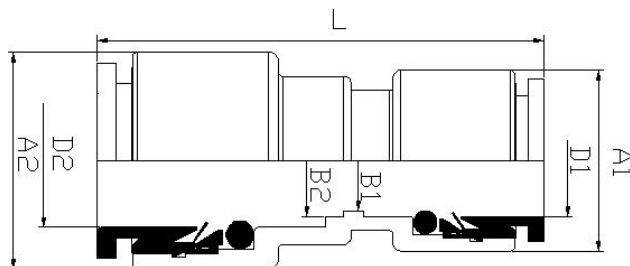

Model	D1	D2	A1	A2	B1	B2	L	Weight(g)
ERPG5-3/2.1	3	5	13.5±0.2	13.5±0.2	2.1±0.12	2.1±0.12	35.8±0.5	3.9±0.1
ERPG5/3.5-3/2.1	3	5	13.5±0.2	13.5±0.2	2.1±0.12	3.5±0.12	35.8±0.5	3.9±0.1
ERPG6-4/3.5	4	6	11±0.2	13.5±0.2	3.5±0.12	3.5±0.12	33±0.5	3.0±0.1
ERPG7/4-3/2.1	3	7	15.2±0.2	15.2±0.2	2.1±0.12	4.0±0.12	41.2±0.5	4.2±0.1
ERPG7/4-4/3.5	4	7	15.2±0.2	15.2±0.2	3.5±0.12	4.0±0.12	41.2±0.5	4.3±0.1
ERPG7/5-4/3.5	4	7	15.2±0.2	15.2±0.2	3.5±0.12	5.0±0.12	41.2±0.5	4.3±0.1
ERPG7-5/3.5	5	7	15.2±0.2	15.2±0.2	3.5±0.12	3.5±0.12	41.2±0.5	4.3±0.1
ERPG7/4-5/3.5	5	7	15.2±0.2	15.2±0.2	3.5±0.12	4.0±0.12	41.2±0.5	4.3±0.1
ERPG8-6/5	6	8	13.5±0.2	15.2±0.2	5.0±0.12	5.0±0.12	35±0.5	4.5±0.1
ERPG8/4-7/4	7	8	13.5±0.2	15.2±0.2	4.0±0.12	4.0±0.12	35±0.5	5.1±0.1
ERPG10/6-7/4	7	10	15.2±0.2	17.5±0.2	4.0±0.12	6.0±0.12	38±0.5	5.4±0.1
ERPG10/7-6/4	6	10	15.2±0.2	17.5±0.2	4.0±0.12	7.0±0.12	38±0.5	5.4±0.1
ERPG10-7/5	7	10	15.2±0.2	17.5±0.2	5.0±0.12	5.0±0.12	38±0.5	5.5±0.1
ERPG10/8-7/5.5	7	10	15.2±0.2	17.5±0.2	5.5±0.12	8.0±0.12	38±0.5	5.4±0.1


MICRODUCT REDUCER

ERPG10/5.5-8/5	8	10	15.2±0.2	17.5±0.2	5.0±0.12	5.5±0.12	38±0.5	5.4±0.1
ERPG12/8-7/4	7	12	15.2±0.2	21.5±0.2	4.0±0.12	8.0±0.12	45±0.5	8.5±0.1
ERPG12/8-8/4	8	12	15.2±0.2	21.5±0.2	4±0.12	8.0±0.12	45±0.5	8.5±0.1
ERPG12/8-8/5.5	8	12	15.2±0.2	21.5±0.2	5.5±0.12	8.0±0.12	45±0.5	8.5±0.1
ERPG12/8-10/6	10	12	17.5±0.2	21.5±0.2	6.0±0.12	8.0±0.12	44.4±0.5	8.8±0.1
ERPG12/8-10/8	10	12	17.5±0.2	21.5±0.2	8.0±0.12	8.0±0.12	44.4±0.5	8.8±0.1
ERPG12-10/8	10	12	17.5±0.2	21.5±0.2	8.0±0.12	8.0±0.12	44.4±0.5	8.8±0.1
ERPG12/10-10/8	10	12	17.5±0.2	21.5±0.2	8.0±0.12	10±0.12	44.4±0.5	8.8±0.1
ERPG14/10-8/5	8	14	15.2±0.2	23.5±0.2	5±0.12	10±0.12	48.5±0.5	10.6±0.1
ERPG14/10-10/6	10	14	17.5±0.2	23.5±0.2	6.0±0.12	10±0.12	48.5±0.5	10.1±0.1
ERPG14/10-10/8	10	14	17.5±0.2	23.5±0.2	8.0±0.12	10±0.12	48.5±0.5	10.1±0.1
ERPG14/10-12/8	12	14	21.5±0.2	23.5±0.2	8.0±0.12	10±0.12	48.5±0.5	12.1±0.1
ERPG14/10-12/10	12	14	21.5±0.2	23.5±0.2	10±0.12	10±0.12	48.5±0.5	12.1±0.1
ERPG14/11-12/10	12	14	21.5±0.2	23.5±0.2	10±0.12	11±0.12	48.5±0.5	12.2±0.1
ERPG16/12-12/8	12	16	23.5±0.2	25.3±0.2	8±0.12	12±0.12	50.5±0.5	15.3±0.1
ERPG16/12-12/10	12	16	23.5±0.2	25.3±0.2	10±0.12	12±0.12	50.5±0.5	15.4±0.1
ERPG16/12-14/10	14	16	23.5±0.2	25.3±0.2	10±0.12	12±0.12	50.5±0.5	14.1±0.1
ERPG18/14-14/10	14	18	25.3±0.2	32.7±0.2	10±0.12	14±0.12	55.8±0.5	24.5±0.1
ERPG18/14-16/12	16	18	25.3±0.2	32.7±0.2	12±0.12	14±0.12	55.8±0.5	22.9±0.1
ERPG20/15-14/10	14	20	25.3±0.2	32.7±0.2	10±0.12	15±0.12	55.8±0.5	21.9±0.1
ERPG20/16-14/10	14	20	25.3±0.2	32.7±0.2	10±0.12	16±0.12	55.8±0.5	21.9±0.1
ERPG20-16/12	16	20	25.3±0.2	32.7±0.2	12±0.12	12±0.12	55.8±0.5	21.2±0.1
ERPG20/16-16/12	16	20	25.3±0.2	32.7±0.2	12±0.12	16±0.12	55.8±0.5	21.2±0.1

*Note: Other size requirements can be contacted for docking sales.



Fiber Cable Solution Technology Co.,Ltd.

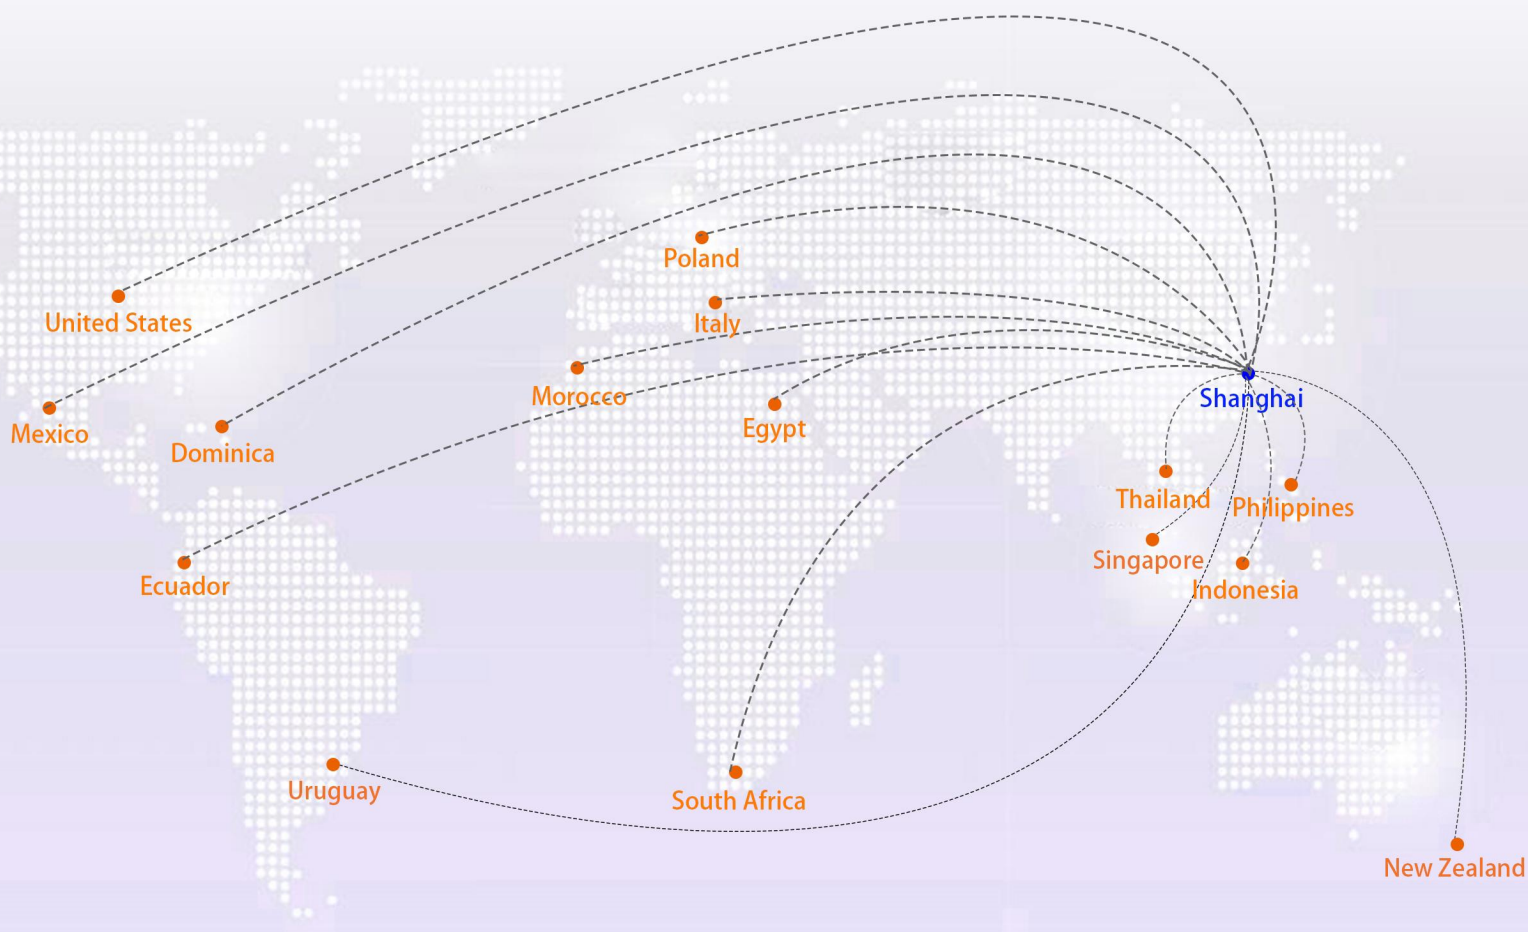

Overseas Agency

 www.fcst.com www.micro-duct.com



FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.

Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793