

SILICONE RUBBER COLD SHRINK TUBE WITH MASTIC



- Much time cost, and labor cost saving.
- IP68 class, stable and long life during operation.
- Easy to install, only three steps (Cover, pull and clench).
- Fast installation, only 15-30 seconds needed to seal one connection.
- High elastic silicone rubber tube structure with mastic built-in, dual layers design can bring double guarantee of weatherproofing protection.

Ordering Information

Silicone Rubber Cold Shrink Tube With Mastic-

Inner Diameter After Shrink Type

1	8.5mm
2	9.0mm
3	16mm
4	17mm
...	Customized

Color Type

1	Black
2	Grey
...	Customized

Mastic Width Type

1	25mm
...	Customized

Relaxed Thickness Type

1	2.5mm
2	2.7mm
3	3.0mm
...	Customized

Relaxed Length Type

1	110mm
2	120mm
3	140mm
...	Customized

Mastic Thickness Type


1	1.1mm
...	Customized

SILICONE RUBBER COLD SHRINK TUBE WITH MASTIC

Specification	FCST-25*120	FCST-28*110	FCST-40*140	FCST-45*140
Inner Diameter Before Shrink	25mm(0.984")	28mm(1.102")	40mm(1.575")	45mm(1.772")
Inner Diameter After Shrink	8.5mm(0.335")	9.0mm(0.354")	16mm(0.630")	17mm(0.669")
Unrelaxed Length	110mm(4.331")	100mm(3.937")	130mm(5.118")	130mm(5.118")
Relaxed Length	120mm(4.724")	110mm(4.331")	140mm(5.512")	140mm(5.512")
Relaxed Thickness	2.5mm(0.098")	2.7mm(0.106")	3.0mm(0.118")	3.0mm(0.118")
Min. Applicable Size	7.3mm(0.287")	8.5mm(0.335")	12mm(0.472")	12mm(0.472")
Max Applicable Size	21mm(0.827")	24mm(0.945")	35mm(1.378")	40mm(1.575")
Mastic Width	25mm(0.984")			
Mastic Thickness	1.1mm(0.043)			
Cables	RG8x, RG8, RG213, RG214, RFC240, RFC400, RFC600, LMR900 1/4", 1/2" Corrugated		RG8, RG213, RG214, RFC400, RFC600, LMR900 1/4", 1/2" Corrugated	
Connectors	4.1/9.5, 4.3/10, BNC, FME, UHF, SMA, TNC, Type N, Type F, NEX10		4.1/9.5, 4.3/10, 7/16, UHF, Type N	



Fiber Cable Solution Technology Co.,Ltd.

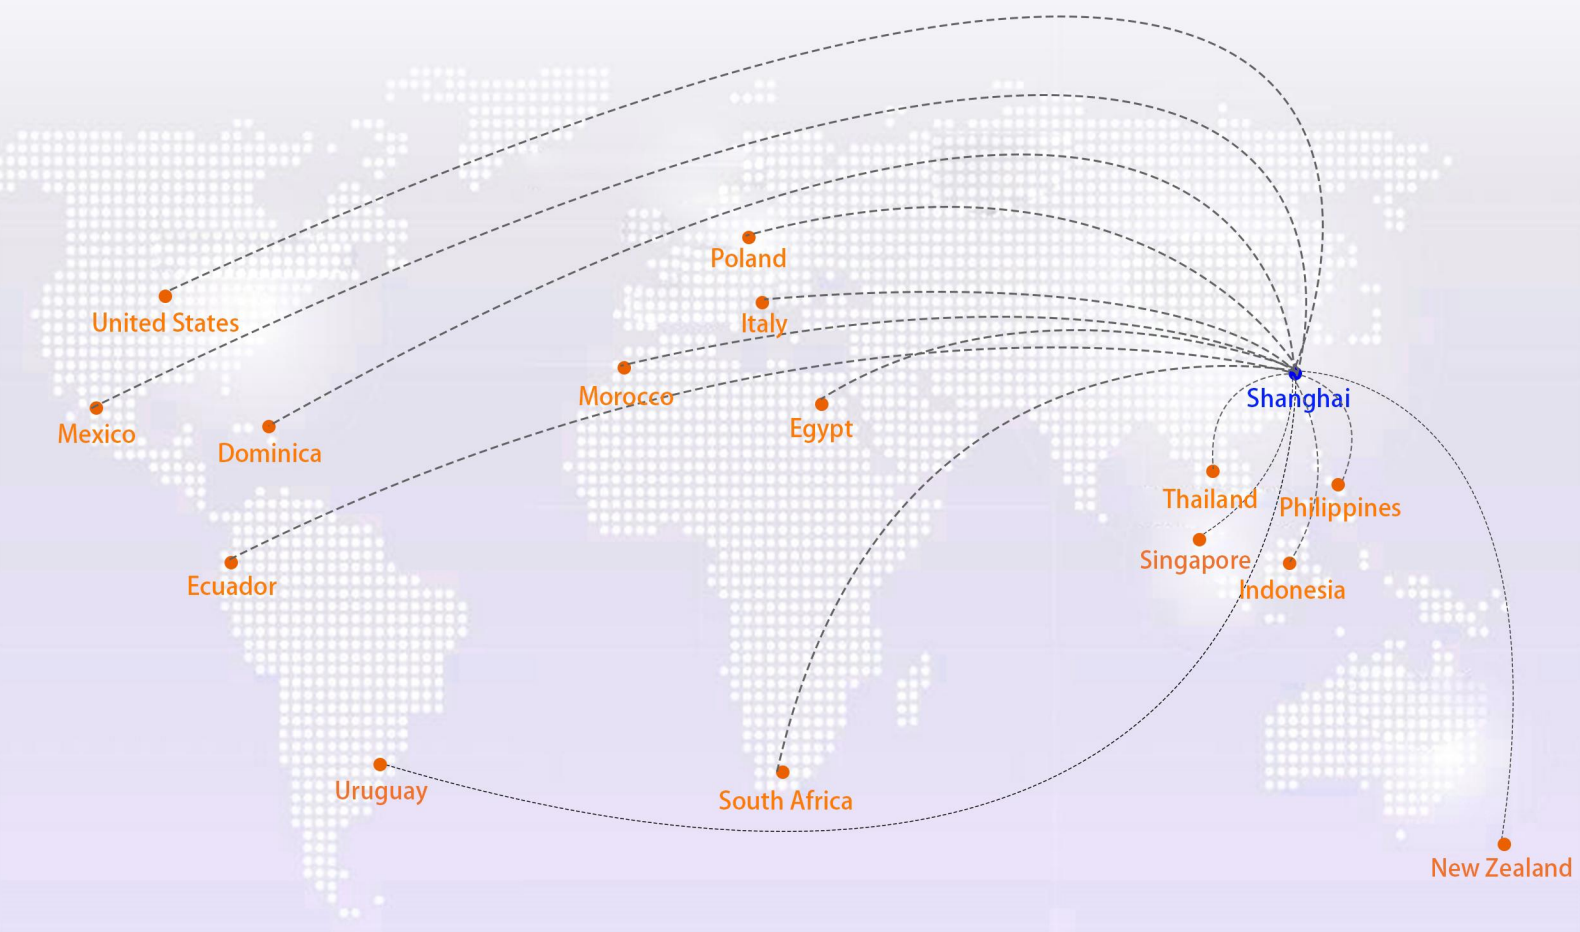

Overseas Agency

 www.fcst.com www.micro-duct.com



FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.

Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793